

SS-4207

Product Description

SS-4207 is a fast curing, self-leveling adhesive silicone RTV that when mixed, applied and cured, results in a translucent green, soft silicone rubber to be formed within hours. When cured, the elastomer resists weathering, ozone, moisture, UV and high temperatures.

Product Features


- Fast deep section, neutral cure
- Excellent tough translucent green gel
- UV indicating

Typical Applications

- Coatings applications
- Encapsulating and potting

Chemical Cure System

Platinum catalyzed, addition cure

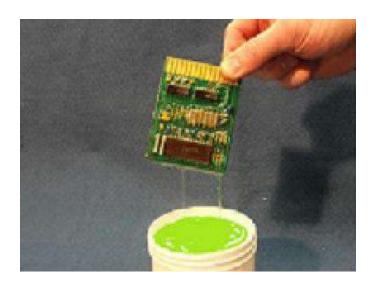

2-Part, Dielectric Tough Gel

Typical Properties

| Color | Translucent Green |
|----------------------------|----------------------|
| Viscosity, cps | 400 |
| Specific Gravity | 0.90 |
| Consistency | Self-Leveling Liquid |
| Work Time @ RT | <10 Minutes |
| Cure Time @ RT | 60 Minutes |
| Cure Time @ 150°C | 2 Minutes |
| Durometer | 59 Shore 00 |
| Dielectric Strength | 20 KV/mm |
| Dielectric Constant | 3.1 |
| Dissipation Factor | 0.01 |
| Volume Resistivity | 4×10^{15} |

Handling Precautions

This is a platinum cure system product. The catalyst can be deactivated by exposure to sulfur containing compounds like thiols, sulfides, sulfates, organic rubber containing sulfur, nitrogen containing compounds like amines, amides, imides, azides, tin metals or compounds, or tin cured RTV's.

Solids

99% solids, contains no solvents

Operating Temperature

-45 - 260C

Adhesion

Primerless adhesion to most plastics, metals and typical substrates.

Limitations

Do not use product in healthcare applications. Allow to fully cure before putting assembly into service.

Handling and Safety

For maximum shelf life, keep containers sealed when not in use. Keep out of the reach of children. Uncured sealant irritates eyes and skin. Refer to the SDS.

Shelf Life

Sealed containers are guaranteed for 12 months from the ship date when stored in a cool dry area below 70° F.

Limited Warranty

All recommendations, statements and technical data herein are based on tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as warranty, either expressed or applied. User shall rely on his/her own information and tests to determine suitability of the product for the intended use, and the user assumes all risk and liability resulting from the use of this product. Manufacturer's sole responsibility shall be to replace that portion of product that the manufacturer proves to be defective. Manufacturer shall not be liable to the buyer or any third party for injury, loss or damage directly or indrectly resulting from the use of, or inability to use, the product. Recommendations or statements other than those contained in a written agreement signed by an officer of the manufacturer shall not be binding by the manufacturer.

This product has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended; or for uses which implantation within the human body is intended.

*****Customized versions available upon request****