



338 REMINGTON ROAD
CUYAHOGA FALLS, OH 44224
Phone: 330.920.3125 Fax: 330.920.3126

SS-6664B

Product Description

SS-6664B is a 1-part silicone RTV developed for conformal coating applications. SS-6664B offers unprimed adhesion to many metals and plastics. High flexibility is combined with a neutral cure system to provide a durable silicone adhesive coating.

Product Features


- Low viscosity
- Self-leveling liquid RTV
- Fast RT cure
- Adhesion to metals and many plastics
- Fluoresces under UV light to enable coating inspection

Typical Applications

- Conformal coating of assemblies
- Industrial sealing & coating
- Thin section potting & encapsulation

Chemical Cure System

Oxime

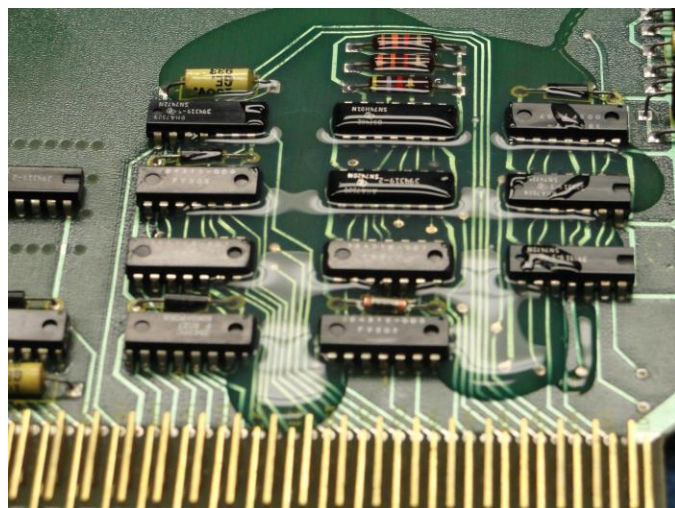

Conformal Coating RTV

Typical Properties

| | |
|---------------------|---------------------|
| Color | Clear |
| Viscosity, cps | 100 |
| Specific Gravity | 0.98 |
| Consistency | Low Viscosity Fluid |
| Working Time @ RT | 10 Minutes |
| Tack Free Time @ RT | 20 Minutes |
| Cure Time | 72 Hours @ RT |
| Durometer | 10 Shore A |
| Dielectric Strength | 20 KV/mm |
| Dielectric Constant | 3.1 |
| Dissipation Factor | 0.01 |
| Volume Resistivity | 4×10^{15} |

Curing

Cure speed can be accelerated with increased humidity and heat to very rapid cure times. Typical utilization involves dispensing in open air and after exposure to ambient humidity, a room temperature cured rubber is formed.

Solids

98% solids, contains no solvents

Limitations

Do not use in a solvent or fuel immersion applications. Allow to fully cure before putting assembly into service.

Handling and Safety

For maximum shelf life, keep containers sealed when not in use. Keep out of the reach of children. Uncured sealant irritates eyes and skin. Refer to the SDS.

Shelf Life

Sealed containers are guaranteed for 12 months from the ship date when stored in a cool dry area below 70°F.

Limited Warranty

All recommendations, statements and technical data herein are based on tests we believe to be reliable and correct, but accuracy and completeness of said tests are not guaranteed and are not to be construed as warranty, either expressed or applied. User shall rely on his/her own information and tests to determine suitability of the product for the intended use, and the user assumes all risk and liability resulting from the use of this product. Manufacturer's sole responsibility shall be to replace that portion of product that the manufacturer proves to be defective. Manufacturer shall not be liable to the buyer or any third party for injury, loss or damage directly or indirectly resulting from the use of, or inability to use, the product. Recommendations or statements other than those contained in a written agreement signed by an officer of the manufacturer shall not be binding by the manufacturer.

This product has not been tested for, and is therefore not recommended for, uses for which prolonged contact with mucous membranes, abraded skin, or blood is intended; or for uses which implantation within the human body is intended.

*******Customized versions available upon request*******